

Dräger PARAT® Escape Hoods

Airborne toxins present an immediate danger to the health of a workforce. When environments turn toxic, a fast, safe escape is crucial. Dräger PARAT® Escape Hoods are designed to be easily donned, protecting users from toxic industrial and fire-related gases, vapors and particles during escape.



READY FOR ESCAPE IN ONLY 3 STEPS

PARAT Escape Hoods are intuitive and easy to use:

1. Open the case – seal is broken, filter plugs release, and canister deploys automatically
2. Put on the hood – internal head harness and elastic neck strap adjusts the hood to fit automatically
3. Escape

ROBUST AND CONFIGURABLE

At Dräger, we understand that escape equipment is stored or carried more than it is used. That is why we considered ergonomics, durability, and carrying comfort when we designed the packaging of the Dräger PARAT. You can order the PARAT with either a Hard Case (IP54) or Soft Pack (IP5) which protects the escape hood from a wide variety of harsh industrial environments. When combined with our extensive list of belt clip, carrying strap, and wall mount accessories, you can configure each escape hood to your ideal carrying solution.

OPTIONS FOR MULTIPLE APPLICATIONS

Different filter options for the PARAT portfolio make the benefits of an escape hood available for a wider range of applications:

1. PARAT 4900 with NIOSH filter: Ideal for escape from a wide range of toxic industrial gasses, vapors, and particulates
2. PARAT 5500 with EN CO-P2 filter: Ideal for escape from fires, fire related gases and H₂S.
3. PARAT 7500 with EN combination fire and multigas filter: Ideal for escape from both fire and toxic industrial gases, vapors and particulates

UP TO 16 YEARS SERVICE LIFE

By replacing the filter after 8 years, you will extend the service life of the Dräger PARAT Escape Hood to 16 years in total (5500 and 7500 versions only), which greatly reduces cost of ownership and long-term maintenance costs. To make things easier for you, Dräger offers filter replacement service and training for your employees.



D-3067-2014

Dräger PARAT® 4900 Escape Hood



D-86029-2013

Dräger PARAT® 5500 Escape Hood

Dräger PARAT Escape Hood

Clearly visible hood

Hood in signal color for high visibility

Overall protection

Hood provides both respiratory and eye protection

Internal head harness

Thanks to the automatically adjusting internal head harness, no additional tightening of the hood is required

Clear view

Wide field of vision due to a specially formed visor, which provides a continuously clear view due to a special anti-fog coating

High-performance filter

Filter expiration date is clearly marked (8 year shelf life per filter); the filter is automatically released from the packaging when opened

Good fit

Specially designed half mask fits a wide variety of face sizes

Exhalation valve

Directly leads the exhaled air out of the half mask

Textile neck seal

Flexible textile neck seal, alternatively available with an elastomeric neck seal for an even higher protection level (PARAT 7500 only)



D-86039-2013

DRÄGER PARAT 4900 INDUSTRIAL ESCAPE HOOD



D-85039-2013

DRÄGER PARAT 4900

- Use: protection against toxic industrial gases, vapors and particles
- Filter: NIOSH OVesc. / SDesc. / HCesc. / HFesc. / AMesc. / HFesc. / CDesc. / HSesc. / MAesc. / R95
- Approval: according to NIOSH 42 CFR Part 84, additionally tested for MV, Formaldehyde, and HCN.
- Packaging types: available in Soft Pack only

DRÄGER PARAT 5500 FIRE ESCAPE HOOD



D-85029-2013

DRÄGER PARAT 5500

- Use: protection against toxic fire-related gases, vapors and particles
- Filter: CO P2 Filter
- Approval: according to EN 403:2004 for fire escape hoods, additionally tested for the use against H₂S (at 2,500 ppm) in accordance with DIN 58647-7
- Packaging types: available in Hard Case, Soft Pack and Single Pack

DRÄGER PARAT 7500 FIRE AND INDUSTRIAL ESCAPE HOOD



D-85039-2013, D-85046-2013

DRÄGER PARAT 7500

- Use: protection against toxic industrial gases, vapors, particles and fire-related gases
- Filter: ABEK CO P3 Filter
- Approval: according to EN 403:2004 for fire escape hoods; according to DIN 58647-7 for filtering escape devices; filter additionally tested in accordance with EN 14387:2004 for gas filter(s) and combined filter(s)
- Packaging types: available in Hard Case and Soft Pack
- Alternatively available with an elastomeric neck seal for increased protection

DRÄGER PARAT TRAINING HOOD



D-85044-2013

DRÄGER PARAT TRAINING HOOD

- Use: for training purposes
- Filter: Hood comes with a filter dummy
- Packaging types: available in Hard Case, Soft Pack and Single Pack


Hard Case

Soft Pack



D-92786-2013

D-92786-2013

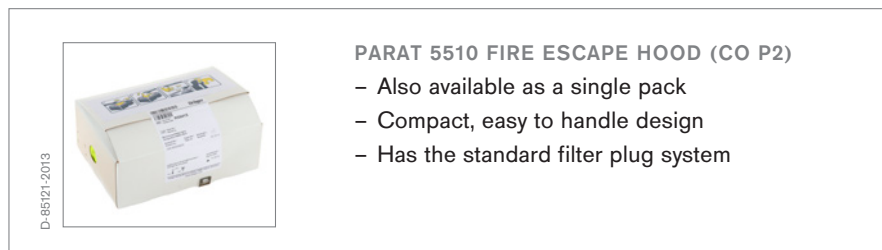

D-85121-2013

MULTIPLE CARRYING OPTIONS

You can comfortably wear your Hard Case or Soft Pack on a belt, shoulder strap, grip clip, or belt clip. A special wall holder is available for the Hard Case.

TECHNICAL DATA

Filter performance	PARAT® 4900: NIOSH Multigas / R95 combination filter for toxic industrial gasses, vapors, and particles PARAT® 5500: CO P2 combination filter against toxic fire-related gases, vapors and particles PARAT® 7500: ABEK CO P3 combination filter against toxic gases, vapors, particles and fire-related gases
Period of use	At least 15 minutes
Total service life	16 years (provided the filter is exchanged after eight years, excluding Parat 4900)
Weight	PARAT® 4920: 675 g PARAT® 5510: 590 g, PARAT® 5520: 660 g, PARAT® 5530: 720 g PARAT® 7520: 770 g, PARAT® 7520e: 850 g, PARAT® 7530: 830 g, PARAT® 7530e: 900 g PARAT® Training Hood Single Pack: 440 g, PARAT® Training Hood Soft Pack: 510 g, PARAT® Training Hood Hard Case: 570 g
Dimensions (length × width × height in mm)	PARAT® 4920: 245 × 160 × 110 PARAT® 5510: 190 × 135 × 90 PARAT® 5520: 215 × 155 × 105 PARAT® 5530: 241 × 143 × 107 PARAT® 7520: 235 × 160 × 115 PARAT® 7530: 249 × 156 × 115 PARAT® Training Hood Single Pack: 190 × 135 × 90 PARAT® Training Hood Soft Pack: 215 × 155 × 105 PARAT® Training Hood Hard Case: 249 × 156 × 114
Approvals	PARAT® 4900: according to NIOSH 42 CFR Part 84 PARAT® 5500: according to EN 403:2004, additionally tested for the use against H ₂ S (at 2,500 ppm) in accordance with DIN 58647-7 PARAT® 7500: according to EN 403:2004 and DIN 58647-7 (filter additionally tested in accordance with EN 14387:2004)

Gas filter capacity according to EN 403:2004*

Type	Test gas	Concentration in ppm	Minimum exposure time in min
CO	Carbon monoxide CO	2,500 ¹	15
A	Acrolein (C ₃ H ₄ O)	100	15
E	Hydrogen chloride HCl	1,000	15
B	Hydrogen cyanide HCN	400	15

* Test conditions: 30 l/min, 70 % relative humidity, 20 °C, test with an artificial lung

¹ Additional tests are carried out at 5,000, 7,500 and 10,000 ppm

Gas filter capacity according to DIN 58647-7*

Type	Test gas	Concentration in ppm	Minimum exposure time in min
A	Cyclohexane (C ₆ H ₁₂)	2,500	15
B	Chlorine (Cl ₂)	2,500	15
B	Hydrogen sulfide (H ₂ S)	2,500	15
B	Hydrogen cyanide (HCN)	2,500	15
E	Sulphur dioxide (SO ₂)	2,500	15
K	Ammonia (NH ₃)	2,500	15
B	Hydrogen sulfide (H ₂ S)	10,000 ^{*)}	5

* Test conditions according to DIN 58647-7: 30 l/min, 70 % relative humidity, 20 °C

^{*)} The penetration safety of the gas filter is additionally tested with 10,000 ppm of hydrogen sulfide.

Gas filter capacity according to DIN 58647-7*

Type	Test gas	Concentration in ppm	Minimum exposure time in min
CO	Carbon monoxide CO	2,500 ¹	15
A	Acrolein (C ₃ H ₄ O)	100	15
E	Hydrogen chloride HCl	1,000	15
B	Hydrogen cyanide HCN	400	15

* Test conditions: 30 l/min, 70 % relative humidity, 20 °C, test with an artificial lung

¹ Additional tests are carried out at 5,000, 7,500 and 10,000 ppm

ORDERING INFORMATION

Dräger PARAT®

Dräger PARAT® 4920, Soft Pack	R 59 423
Dräger PARAT® 5510, Single Pack	R 59 415
Dräger PARAT® 5520, Soft Pack	R 59 425
Dräger PARAT® 5530, Hard Case	R 59 435
Dräger PARAT® 7520, Soft Pack	R 59 427
Dräger PARAT® 7530, Hard Case	R 59 437
Dräger PARAT® 7520e (with elastomeric neck seal), Soft Pack	R 59 428
Dräger PARAT® 7530e (with elastomeric neck seal), Hard Case	R 59 438
Dräger PARAT® Training Hood, Single Pack	R 59 410
Dräger PARAT® Training Hood, Soft Pack	R 59 420
Dräger PARAT® Training Hood, Hard Case	R 59 430

Accessories

Replacement Filter Set: Dräger PARAT® 5510 (includes CO P2 filter and label)	R 59 474
Replacement Filter Set: Dräger PARAT® 5520/5530 (includes CO P2 filter and security seal)	R 59 475
Replacement Filter Set: Dräger PARAT® 7500 (includes ABEK CO P3 filter and security seal)	R 59 477
Wall Holder PARAT® Hard Case	R 59 451
Waist Belt, textile	67 33 934
Waist Belt, plastic	R 53 026
Shoulder Strap	R 59 461
Belt Clip	R 59 456
Grip Clip	R 59 455
Adapter Plate for PARAT® Soft Pack	R 58 742
D-Ring for PARAT® Hard Case	R 59 457

PARAT® is a trademark of Dräger.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53-55
23558 Lübeck, Germany

www.draeger.com

CANADA

Draeger Safety Canada Ltd.
2425 Skymark Ave
Mississauga, Ontario, L4W 4Y6
Tel +1 905 821 8988
Toll-free +1 877 Dräger 1
(+1 877 372 4371)
Fax +1 905 821-2565
Toll-free Fax +1 800 329 8823

MEXICO

Draeger Safety S.A. de C.V.
German Centre
Av. Santa Fe, 170 5-4-14
Col. Lomas de Santa Fe
01210 México D.F.
Tel +52 442 246-1113
Fax +52 442 246-1114

Customer Service
Tel 800 723 3891

REGION CENTRAL

AND SOUTH AMERICA
Dräger Panama S. de R.L.
Complejo Business Park
V tower, 10th floor, Panama City
Tel +507 377-9100
Fax +507 377-9130
contactcsa@draeger.com

USA

Draeger Safety, Inc.
101 Technology Drive
Pittsburgh, PA 15275
Tel +1 412 787 8383
Fax +1 412 787 2207

Customer Service
Tel 800 858 1737
Fax 800 922 5519

Technical Service
Tel 888 794 3806
Fax 888 794 3807

Manufacturer:

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany